


**Eliminates Nail and Fastener Pops**

# DRYWALL

## Construction Adhesive

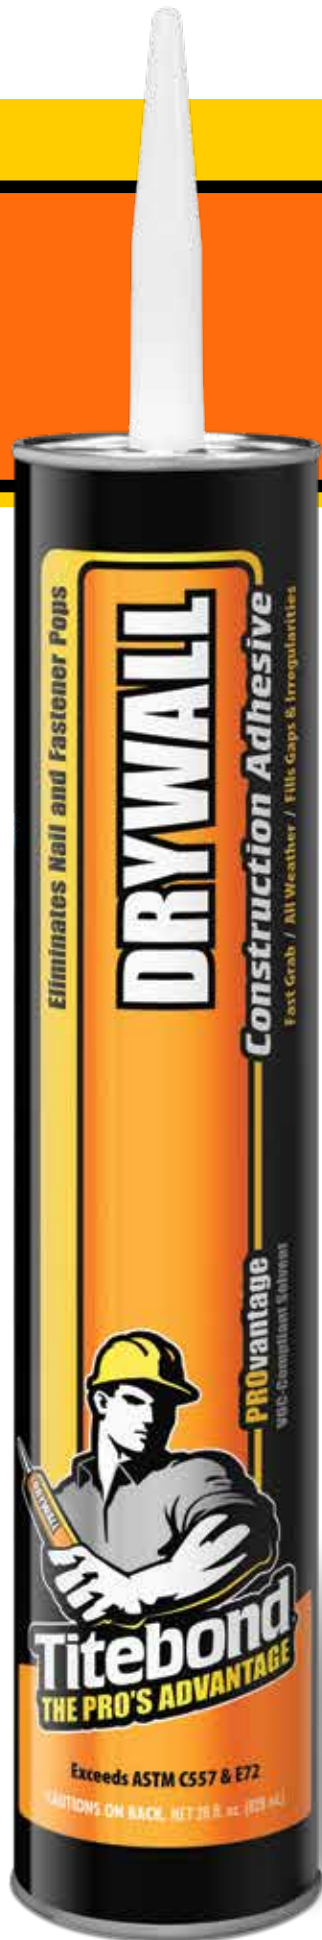

Titebond® PROvantage™ Drywall Construction Adhesive is specifically designed for installing drywall and paneling to most common building materials including wood and metal studs. It offers excellent adhesion, eliminates nail pops and provides a “no sag” installation.

### PROvantage VOC-Compliant Solvent

VOC-compliant

Moisture-resistant

Reduces sound transmission

Wood & metal studs

Strong fast grab

Fills gaps & irregularities

Eliminates nail pops

#### Recommended For


Installation of drywall and paneling to most common building materials.

#### Specifications & Certifications

Exceeds ASTM C557. Tested in accordance with ASTM E72 for racking and shearing.

#### Compatible Materials

Common building materials including wood, metal, gypsum wallboard, plywood, hardboard, tile board, plaster, wallpaper (non-vinyl), cement backer board and most other porous materials.

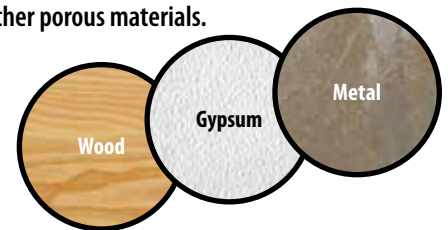

**Titebond®**  
**THE PRO'S ADVANTAGE**

## Ordering/Sku Information

Size	Part Number	UPC	Case UPC	Weight	Units Per Package	Packages Per Pallet
28 Oz. Cartridge	5342	037083053425	10037083053422	30.85 lbs.	12	44

### Technical Information

- **Application Temperature:** 0°F to 100°F
- **Service Temperature:** 0°F to 120°F
- **Working Time:** Approximately 20 minutes for a 1/4" bead

### Physical Properties

- **Type:** Proprietary synthetic polymer
- **State:** Thixotropic medium-viscosity mastic
- **Color:** Light brown
- **Solids:** 67%
- **Viscosity:** 150,000 cps
- **VOC:** < 50 g/L
- **Weight/Gallon:** 10.6 lbs.
- **Flashpoint:** < 0°F
- **Freeze/Thaw Stability:** Will not freeze
- **Storage Life:** 18 months in tightly closed containers at 75°F
- **Odor:** Solvent (strong)

### User Tips

Not designed for continuous submersion. Do not use on vinyl-coated drywall, polystyrene foam or rigid plastics. Do not adhere one non-porous material to another as this will slow or prevent drying.

### Directions

**PREP:** Surfaces must be clean and free of any material that may prevent adequate adhesion.

**APPLICATION:** Cut tip on slant for 1/4" to 3/8" bead. Puncture inner seal and place in cartridge gun. Apply continuous bead of adhesive to studs or furring strips. Where two panels join, apply a zigzag bead so adhesive will contact both panels. **Adhere materials within 20 minutes.** Press surfaces firmly together for full contact with adhesive. **Note:** For drywall, use fasteners in accordance with local building standards. For paneling or other large applications, use finishing nails at top and bottom and brace overnight as needed. When applying adhesive overhead for ceiling applications, use 3/8" bead or less.

**CLEANUP:** Tools and adhesive may be cleaned with acetone or mineral spirits. Follow solvent vendor's precautions.

### Coverage

Size	1/8" bead	1/4" bead	3/8" bead
28 Oz. Cartridge	355 ft.	86 ft.	39 ft.

**PRO**vantage  
VOC-Compliant Solvent

Visit [Titebond.com](http://Titebond.com) for the most up-to-date product information.

Franklin International



Columbus, Ohio 43207 614.443.0241 Technical Service 1.800.347.4583 © 2019 01379\_3755bcm FF1156

