



WeatherMaster Sealant

FIBER CEMENT BOARD

Installation Guide



Application Directions

- Surfaces must be clean and free of any material that may prevent adequate adhesion.
- Remove nozzle, cut tip of the nub and puncture inner foil seal. (Figure B)
- Screw nozzle onto cartridge and cut tip on slant for ¼" to 3/8" bead and place in cartridge gun.
- Force sealant into clean joint. Always apply sealant in bead form. (Figure D)
- To ensure neat sealant lines, mask areas adjacent to joints. (Figure C)
- Once sealant is dry to the touch and does not transfer, remove masking tape. (Figure F)

User Tips

- Not designed for continuous submersion or use below the waterline.
- When installing fiber cement siding, refer to the manufacturer's recommendations for gap filling to allow for expansion and contraction. (Figure A)
- Air, sealant and surface temperature should be above 0°F.
- Once sealant is applied, do not wipe with solvents or tooling aids such as soaps or oils. DO NOT TOOL – DO NOT SMEAR. (Figure E)
- It is highly recommended to use backing material.
- Application of sealant at high temperatures may cause the sealant to sag in some applications.
- For best results, store in a dry location at or below 75°F.

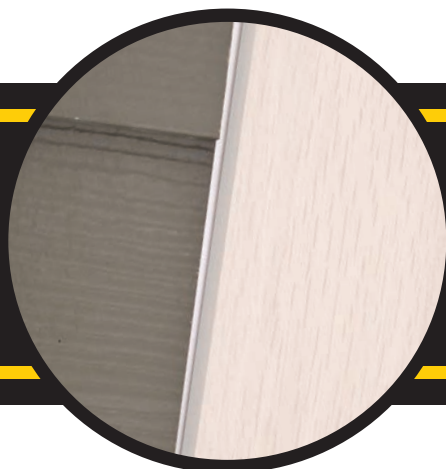


Figure A

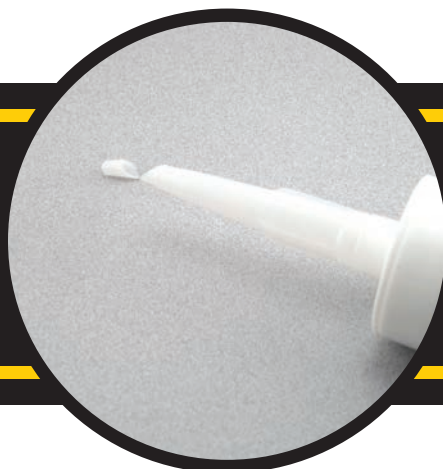


Figure B



Figure C

Compatibility

If application is for Kynar™ coated materials, use WeatherMaster Metal Roof Sealant. For use on polycarbonate, check with polycarbonate supplier on compatibility. Do not apply WeatherMaster Translucent to polycarbonate due to solvent cracking. Contact with asphalt or butyl may cause discoloration, but will not affect product performance. For questions, please call our Help Line at 1-800-347-4583.

Painting

Sealant is intended for exterior use. If used indoors, sealant may need to be painted. In most cases, painting may occur one hour after application with a high-quality acrylic, water-based (latex) paint that does not contain plasticizer. For other paint types, a compatibility test is recommended. Titebond WeatherMaster Translucent (#44011) is not paintable.

Coverage

9.5 oz Cartridge provides approximately 29 linear feet of sealant at a ¼" bead.

Cleanup

Clean uncured material with acetone or isopropyl alcohol. After curing, excess sealant must be cut or scraped away. Follow solvent vendor's precautions when using solvents.



Figure D



Figure E



Figure F

Titebond®
THE PRO'S ADVANTAGE



AVAILABLE IN OVER 200 COLORS

WeatherMaster Matches Today's Most Popular Siding Colors,
Regardless of the Material or Manufacturer.



Visit Titebond.com for the most up-to-date product information.

Franklin International

